


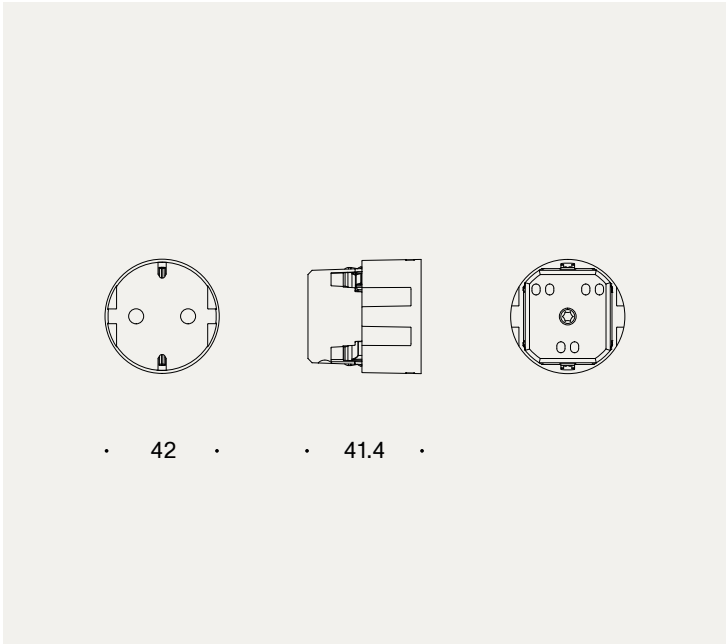

socket 3.0 type F

installation

socket specs

application	16A/250V	
flush-mounting depth	41.4mm	
wire stripping length	13.8mm	
wire capacity	up to 4 x 2.5mm ² per terminal	
wire fixation	screw terminal (TX8)	
ambient temperature	-5 till +40°C	
IP, IK rating	IP21-D	IK06
marking	CE	

accessories

retrofit plaster ring 3.0	0042-0001
backfit holder 3.0 - 12 mm	0042-0015
backfit holder 3.0 - 16 mm	0042-0016
backfit holder 3.0 - 19 mm	0042-0019
backfit holder 3.0 - 22 mm	0042-0022
removal tool 3.0	0042-0000
bi-metal hole saw Ø42	8880-2522
bi-metal hole saw adapter	8880-2524
bi-metal hole saw Ø42 + adapter (set)	8880-2525