


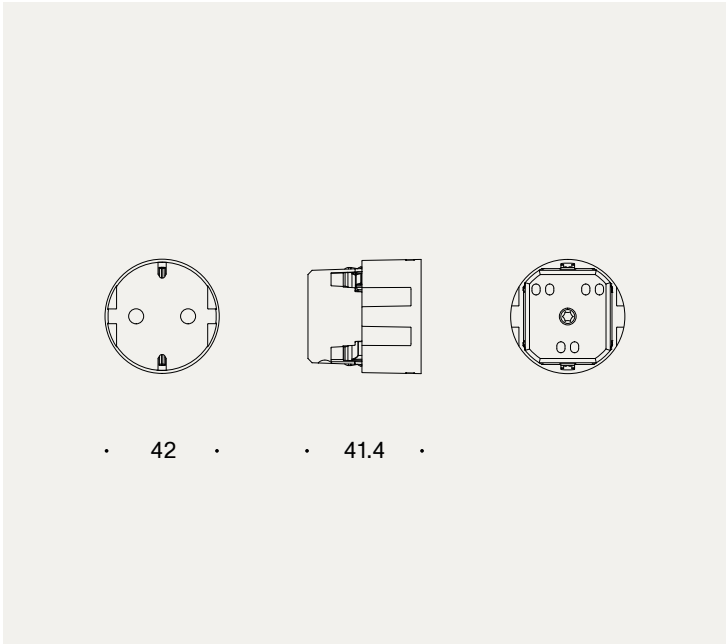

rond 3.0 socket type F

installation

socket specs

application	16A/250V	
flush-mounting depth	41.4mm	
wire stripping length	13.8mm	
wire capacity	up to 4 x 2.5mm ² per terminal	
wire fixation	screw terminal (TX8)	
ambient temperature	-5 till +40°C	
IP, IK rating	IP21-D	IK06
marking	CE	

order number

rond 3.0 - backfit holder - 19mm	0042-0019
rond 3.0 - backfit holder - 22mm	0042-0022
rond 3.0 - removal tool	0042-0000